



SCHEDA TECNICA

**PARIDE**

**freud.**

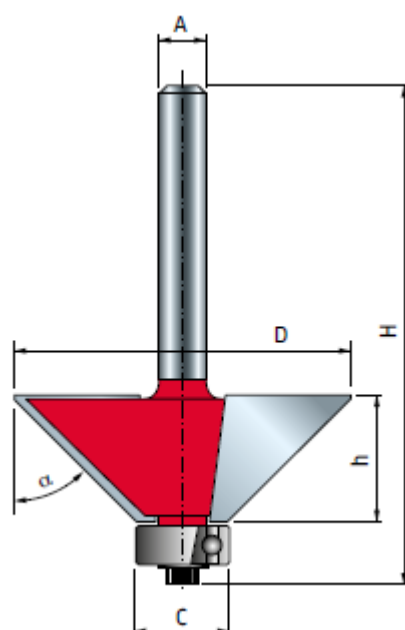

| D<br>mm | h<br>mm | H<br>mm | A<br>mm | C<br>mm | α     | Z | Max RPM<br>1/min. | Code<br>Codice | SAP<br>SAP |
|---------|---------|---------|---------|---------|-------|---|-------------------|----------------|------------|
| 18,15   | 12,7    | 54,9    | 6       | 12,7    | 15°   | 2 | 24.000            | 40-10006P      | F03FR01906 |
| 21,8    | 25      | 67,3    | 6       | 12,7    | 11,3° | 2 | 24.000            | 40-09406P      | F03FR01900 |
| 23,6    | 12,7    | 54,9    | 6       | 12,7    | 25°   | 2 | 24.000            | 40-10206P      | F03FR01912 |
| 24      | 14      | 46      | 6       | ■       | 15°   | 2 | 24.000            | 40-90006P      | F03FR01927 |
| 24      | 12      | 44      | 6       | ■       | 30°   | 2 | 24.000            | 40-90206P      | F03FR01929 |
| 25      | 8       | 41      | 6       | ■       | 45°   | 2 | 24.000            | 40-90406P      | F03FR01931 |
| 25,4    | 25,4    | 73,7    | 6       | 12,7    | 15°   | 2 | 24.000            | 40-09806P      | F03FR01903 |
| 31      | 9,5     | 52      | 6       | 12,7    | 45°   | 2 | 18.000            | 40-10506P      | F03FR01917 |
| 30,1    | 22,5    | 64,7    | 6       | 12,7    | 22,5° | 2 | 18.000            | 40-10106P      | F03FR01909 |
| 33      | 11,5    | 54      | 6       | 12,7    | 45°   | 2 | 16.000            | 40-10406P      | F03FR01914 |
| 33      | 19      | 61,6    | 6       | 12,7    | 30°   | 2 | 16.000            | 40-20206P      | F03FR01925 |
| 44      | 18,5    | 61      | 6       | 12,7    | 45°   | 2 | 16.000            | 40-10606P      | F03FR01919 |

**WWW.FERRAMENTAPARIDE.IT**