


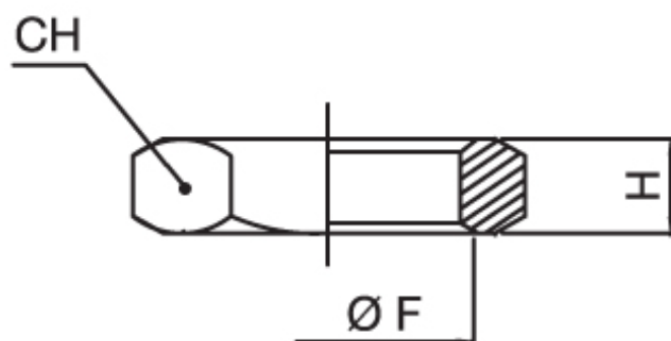

F	H	CH
1/8	4.5	14
1/4	5	17
3/8	5.5	19
1/2	6	24

Articolo:

226

CONTRODADO
RING NUT

 **AIREX®**

CAMPI DI IMPIEGO: Circuiti pneumatici, oleodinamici e idraulici

MATERIALI IMPIEGATI: Ottone UNI EN 12164 CW 614N. Ottone UNI EN 12165 CW 617N. Guarnizione NBR

TRATTAMENTO SUPERFICIALE: Nichelatura

FILETTATURA: Gas conica ISO 7 – DIN 2999 – BS21. Gas cilindrica ISO 228. Metrica ISO R/262

APPLICATION FIELDS: Pneumatic, hydraulic and hydraulic circuits

MATERIALS USED: Brass UNI EN 12164 CW 614N. Brass UNI EN 12165 CW 617N. Gasket NBR SURFACE

TREATMENT: Nickel Plating

THREAD: Conical gas ISO 7 - DIN 2999 - BS21. Cylindrical gas ISO 228. Metric ISO R/262