


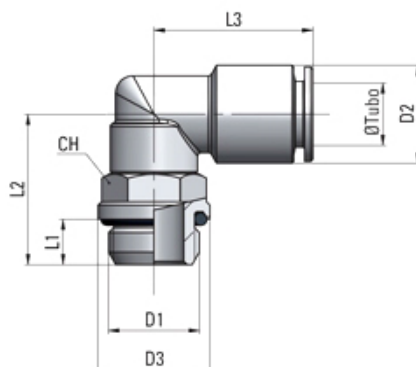

Tubo	D1	D2	D3	L1	L2	L3	CH	gr.
3	M5X0.8						9	88
4	M5X0.8	9	10	4	14	17,5	9	8,8
6	M5X0.8	12	10	4	14	20,5	9	11,9
4	1/8	9	14,5	5	18	19,5	13	15,7
6	1/8	12	14,5	5	18	22	13	18,5
8	1/8	14	14,5	5	18	22,5	13	22
6	1/4	12	16	6,5	21,5	22	13	21,8
8	1/4	14	16	6,5	21,5	22,5	13	25,3
10	1/4	16	16	6,5	22	26	16	34
8	3/8	14	20	7	25,5	23	16	37,7
10	3/8	16	20	7	25,5	26	16	39,5
12	3/8	19	20	7	26	28,5	20	57
12	1/2	19	25	8,5	30,5	28,5	20	65,1

Articolo:

350Z

ANGOLO GIREVOLE MASCHIO
CILINDRICO
CYLINDRICAL MALE SWIVEL ELBOW

 **AIREX®**

CAMPI DI APPLICAZIONE: impianti pneumatici

MATERIALI: ottone UNI EN 12164 CW 614 N. Ottone UNI EN 12165 CW 617 N. Nichelato

FILETTATURE: coniche pretefalonate.

APPLICATION FIELDS: pneumatic plants

MATERIALS: brass UNI EN 12164 CW 614 N. Brass UNI EN 12165 CW 617 N. Nickel-plated

THREADS: pre-teflon coated conical.