





Con perni di posizionamento



Assegnazione	Significato	Sistema
[A]	12,0 mm	12/18-9, 12/18-13
	14,0 mm	12/20-9, 12/20-13
[B]	Foratura Ø 34 mm, profondità 5 mm	-
[C]	0,5 mm	12/18-9, 12/18-13
	1,5 mm	12/20-9, 12/20-13
[D]	Foratura Ø 7 mm, profondità 5 mm	-

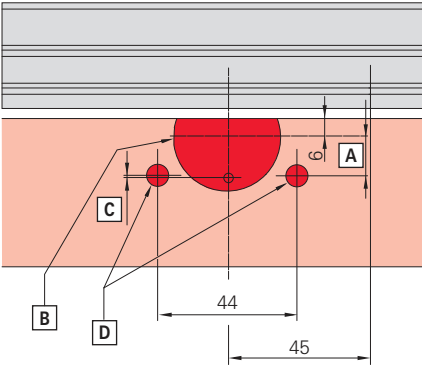

6.9.1.1 Standard



				Nº
12/18-9 12/18-13	max. 130 kg	–	Roto Sil	787199
	max. 150 kg	2 x Ø 7 mm	Roto Sil	787200
		2 x Ø 7 mm	Bianco	787204
		2 x Ø 7 mm	Titanio	795031
12/20-9 12/20-13	max. 130 kg	–	Roto Sil	787201
	max. 150 kg	2 x Ø 7 mm	Roto Sil	787202
		2 x Ø 7 mm	Bianco	787206
		2 x Ø 7 mm	Titanio	828687

Per ogni supporto articolazione è necessario un perno supporto articolazione. Per i dettagli vedere → *da pagina 563.*

Per le coperture adatte vedere → *564.*



INFORMAZIONI

In caso di PA > 100 kg, avvitare con 5 viti.