


5.1.4 Centre lock with long face plate i.S.						
		Use as centre lock.				
silver	400	1	751 - 1.050	10	55339 ¹	
	528	1	1.051 - 1.300	10	55340	
	628	1	1.301 - 1.500	10	55341	
	828	1	1.501 - 1.750	10	55342	
	1.178	2	1.751 - 1.950	10	55343	

¹ It is not possible to connect this to espagnolette size 00.

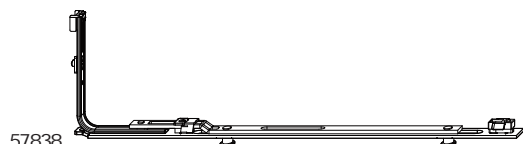

5.1.5 Centre lock i.S. EH							
silver	125	1	280 - 480	280 - 600	20	52772	
	300	2	481 - 600	601 - 750	20	57838 ¹	
	400	2	601 - 800	751 - 1.050	20	52773 ²	
	528	2		1.051 - 1.300	20	52774	
	628	2	801 - 1.000	1.301 - 1.500	20	52775 ³	
	828	2	1.001 - 1.200	1.501 - 1.750	20	52776	
	1.028	3	1.201 - 1.300	1.201 - 1.400	10	55441 ¹	
	1.178	3	1.301 - 1.500	1.751 - 1.950	10	57277	
	extendable	1.178	3	1.951 - 2.600	10	10905 ⁴	
		1.678	4	1.951 - 2.350	10	59921	
		2.178	5	2.351 - 2.600	10	209636	

¹ To be used on B.R.G.2 (RC) windows in accordance with EN 1627-30.

² It is not possible to connect this to espagnolette size 00.

³ Application area for 2-sashed windows: SRW 801-1300.

⁴ Max. application range in connection with bolt extension.



5.1.6 Centre lock DIN security							
		Corner element with 1 i.S.		Corner element with 2 i.S.			
silver	size 2	2	630 - 850	800 - 1.000	10	52914	
	size 3	3	851 - 1.100	1.001 - 1.250	10	52915	
	size 4	3	1.001 - 1.350	1.251 - 1.500	10	52916 ¹	
	size 6	4	1.700 - 1.950	1.850 - 2.100	10	52917	

¹ For application range S.R.H. 1501-1849mm use extensions with i.S. cams.