

352

15kg PORTATA
CARRYING CAPACITY

GUIDA A SFERE AD ESTRAZIONE PARZIALE

BALL BEARING SINGLE EXTENSION RUNNER



ESTRAZIONE PARZIALE
SINGLE EXTENSION



FISSAGGIO LATERALE
SIDE MOUNTING



FISSAGGIO ORIZZONTALE
HORIZONTAL MOUNTING

ESEMPIO DI APPLICAZIONE / EXAMPLE OF APPLICATION



Portata massima kg 15.

La portata massima si riferisce al carico massimo consentito per coppia di guide (mm 400) con montaggio laterale.

Il montaggio orizzontale delle guide **riduce la portata al 50%** del carico massimo con montaggio laterale.

Gabbia in metallo con sfere $\varnothing 3/16"$.
Fissaggio laterale.


Carrying capacity kg 15.

The carrying capacity is referred to the maximum load for a pair of side mounted slides (mm 400).

The horizontal mounting (flat) **reduces the carrying capacity to approximately 50%** of the side mounted capacity.

Metal cage with balls $\varnothing 3/16"$.
Side mounting.

352

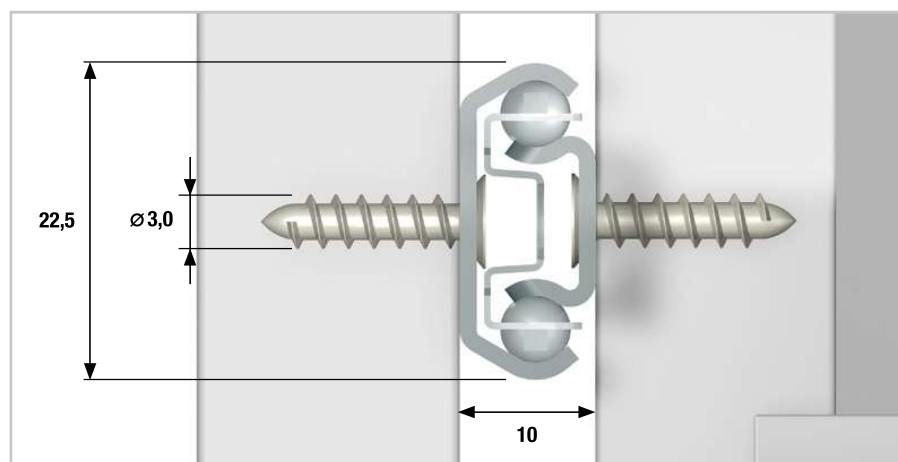
SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS


Foratura a passo 32 mm.
Profili in acciaio zincato.
Spessore profili 1,20 mm.

32 mm drilling pattern.
Profiles made of zinc plated steel.
Profiles thickness 1,20 mm.



SCHEMA FORATURA / HOLE PATTERN

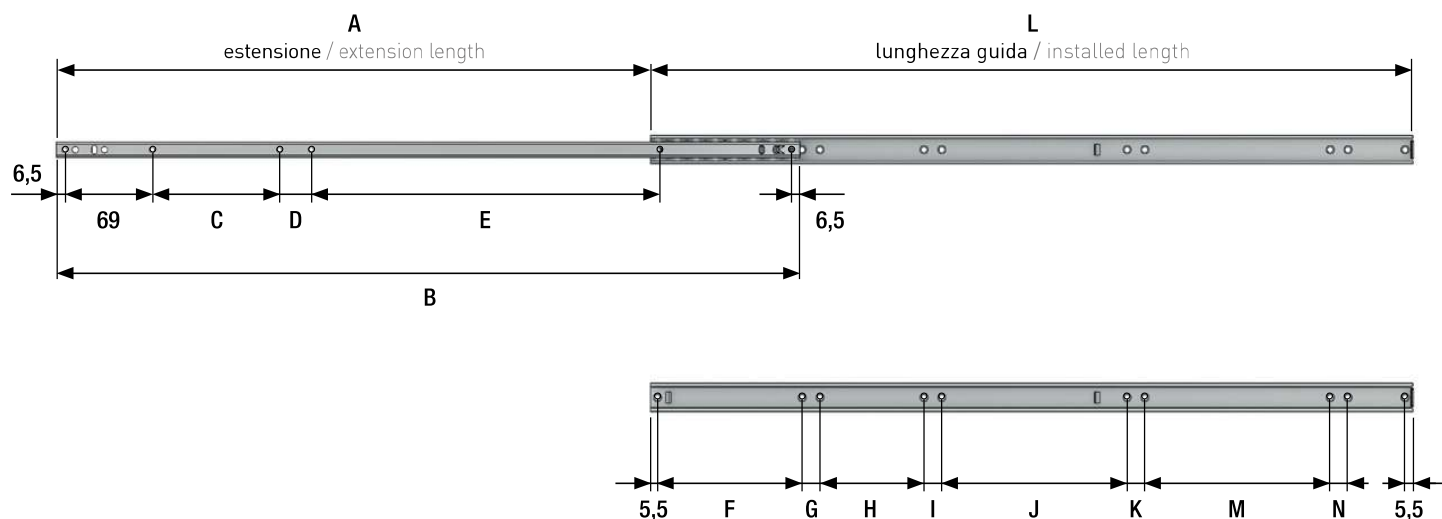

Cod. XXXX* Code XXXX*	L mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	M mm	N mm	 Imballo Packing
0020	200	128	185	—	—	—	114	14	—	—	—	—	—	—	50
0025	250	178	235	—	—	—	178	14	—	—	—	—	—	—	50
0030	300	228	285	99,5	—	—	114	14	114	14	—	—	—	—	50
0035	350	278	335	149,5	—	—	114	14	146	14	—	—	—	—	50
0040	400	328	385	150	—	—	114	14	210	14	—	—	—	—	50
0045	450	378	435	174	—	—	114	14	242	14	—	—	—	—	50
0050	500	368	485	100	25	149,5	114	14	82	14	210	14	—	—	50
0055	550	418	535	100	50	149,5	114	14	82	14	146	14	82	14	50
0060	600	468	585	100	25	274,5	114	14	82	14	146	14	146	14	50

*Codice / Ordering Code: **00352/000/00/XXXX/00**