## **SCHEDA TECNICA**



## SERRATURA APPLICARE BLINDATI SERIE 265 SECUREMME TRIPLICE CHIUSURA AD INGRANAGGI

## FISSAGGIO PLANARE/LATERALE | PLANAR/LATERAL FIXING

Mano destra (D)  Right hand (D)  *	g	Mano destra (D)  Right hand (D)	g	Sporgenza pistoni (S) Projection bolts (S)	Interasse <i>Interspace</i>	<b>*</b>
265 1 D CR0328GXX	2458	265 1 D CR0328TXX	2560	3 mm	28 mm	5
265 1 D CR0628GXX	2508	265 1 D CR0628TXX	2610	6 mm	28 mm	5
265 1 D CR1328GXX	2606	265 1 D CR1328TXX	2708	13 mm	28 mm	5
265 1 D CR4328GXX	2976	265 1 D CR4328TXX	3078	43 mm	28 mm	5
265 1 D CR0337GXX	2358	265 1 D CR0337TXX	2460	3 mm	37 mm	5
265 1 D CR0637GXX	2408	265 1 D CR0637TXX	2510	6 mm	37 mm	5
265 1 D CR1337GXX	2506	265 1 D CR1337TXX	2608	13 mm	37 mm	5
265 1 D CR4337GXX	2876	265 1 D CR4337TXX	2978	43 mm	37 mm	5

\* Per ordinare l'articolo con mano S/R/L To order the S/R/L lock

2651 R CR0328GXX


\* Per ordinare l'articolo in confezione industriale (- 1 €)
To order the lock in industrial packaging (- 1 €)
265 0 DCR0328GXX = 64 €










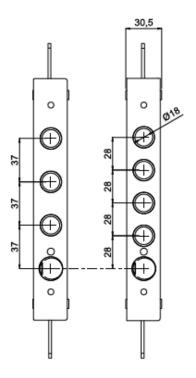

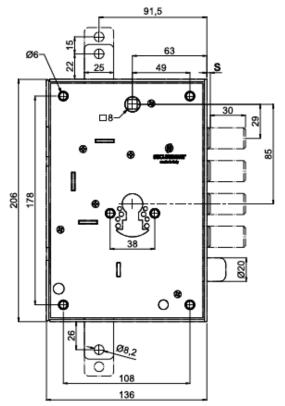

WWW.FERRAMENTAPARIDE.IT